




THERMOSTAT CABLES

No. of Conductors	Color of Singles	AWG # 20-UL Carton/Spool	AWG # 18-UL Carton/Spool
2	White/Red	4000'/500'	2000'/500'
3	Add Green	2000'/500'	2000'/500'
4	Add Blue	2000'/500'	1000'/250'
5	Add Yellow	2000'/500'	1000'/250'
6	Add Brown	1000'/250'	1000'/250'
7	Add Orange	1000'/250'	1000'/250'
8	Add Black	1000'/250'	1000'/250'
9	Add Purple	1000'/250'	1000'/250'
10	Add Gray	1000'/250'	1000'/250'
11	Add Pink	500'/250'	500'/250'
12	Add Tan	500'/250'	500'/250'

Construction:

Solid copper conductors insulated with 75°C color coded PVC. The jacket is 75°C PVC brown or white.

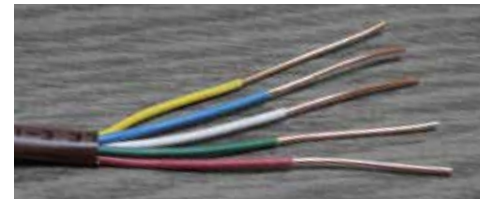

Available as:

(UL) C(UL) NEC ARTICLES 725, 760, 800, AWG #18 OR #20, Type CL3R, FPLR, CMR, SUN RES

14 AWG 4 Conductor Mini Split Type TC Power & Control Tray Cable – 600V



Conductors	14 AWG, 4 Conductors, 19/.0147 Stranded Bare Copper
Insulation	.030" PVC – Type TW Conductors
Color Code	Black, White, Red, Green
Binder	Tissue Paper
Jacket	.045" PVC (Black)
Cable OD	.404" nominal
Voltage	600 Volts
Marking	Marked and manufactured in accordance with UL 1277 – Electrical Power & Control Tray Cable – Direct Burial & Sunlight Resistant Rated – FT-4 Flame Tested
Part Number	140422TC-MINISPLIT-BLK

